

CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS

Whitmore Lake, Michigan 48189 313-231-4911
www.sturdibilt.com email: sbrei@juno.com

SPECIFICATION SHEET



Standard 2




Thrift Air "TC96" Slant Canopy




NFPA#96

Special Construction for Concession Trailers

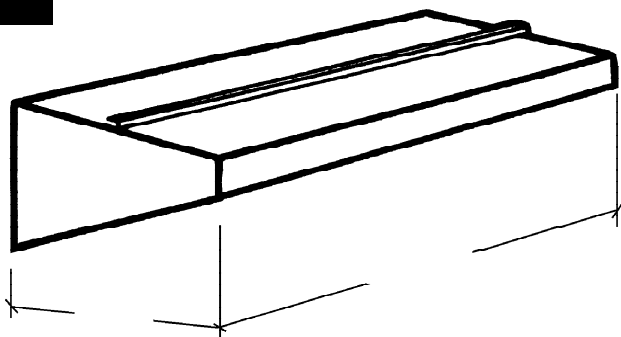

Job Name		
Dealer		
Contact		
Ship To		
Canopy Series TC96S0	By	Quote Date
Purchase Order Number	ISFF	Purchase Order Date

TC	DIMENSIONAL DATA				
"W"	"B"	"H"	"T"	"FH"	"F"
30"	12"	13½"	16"	3"	10"
36"	12"	13½"	16"	3"	10"
42"	12"	13½"	16"	3"	10"
48"	12"	13½"	16"	3"	10"

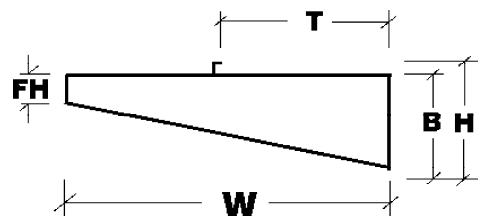

Specifications

- TC96S0 Series Thrift Air Concession Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96, and International Mechanical Code Standards.

☐ **Air Space:** NFPA 3" Air Space on (back)(left)(right) for use on fire rated drywall on steel stud walls